FEATURES

- Smallest Encapsulated 50W Converter
- Ultra-compact 2" X 1" Package
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- Excellent Efficiency up to 92%
- I/O Isolation 1500 VDC
- Operating Ambient Temp. Range -40℃ to +80℃
- No Min. Load Requirement
- Overload/Voltage/Temp. and Short Circuit Protection
- Remote On/Off Control, Output Voltage Trim
- Shielded Metal Case with Insulated Baseplate
- UL/cUL/IEC/EN 60950-1 Safety Approval

CSA 60950-1 CB Scheme

PRODUCT OVERVIEW

The MINMAX MKWI50 series is the latest generation of high performance dc-dc converter modules setting a new standard concerning power density. The product offers fully 50W in an encapsulated, shielded metal package with dimensions of just 2.0"x1.0"x0.4".All models provide ultra-wide 4:1 input voltage range and precisely regulated output voltages.
A very high efficiency up to 92% which allows an operating temperature range of -40°C to +80°C is achieved by advanced circuit topology . Further features include remote On/Off, trimmable output voltage, under-voltage shutdown as well as overload and over-temperature protection.
Typical applications for these converters are battery operated equipment, instrumentation, distributed power architectures in communication and industrial electronics and many other space critical applications.

Model Selection Guide

Model Number	Input Voltage (Range)	Output Voltage	Output Current	Input Current		Reflected Ripple Current	Over Voltage Protection	Max. capacitive Load	Efficiency (typ.)
			Max.	@Max. Load	@No Load				@Max. Load
	VDC	VDC	mA	mA(typ.)	mA(typ.)	mA(typ.)	VDC	μF	%
MKWI50-24S033	24 (9 ~ 36)	3.3	10000	1528	80	40	3.9	26000	90
MKWI50-24S05		5	10000	2290	60		6.2	17000	91
MKWI50-24S12		12	4170	2267	80		15	3000	92
MKWI50-24S15		15	3330	2263	80		18	2000	92
MKWI50-24S24		24	2080	2286	80		30	750	91
MKWI50-48S033	48 (18 ~ 75)	3.3	10000	764	40	30	3.9	26000	90
MKWI50-48S05		5	10000	1145	30		6.2	17000	91
MKWI50-48S12		12	4170	1134	60		15	3000	92
MKWI50-48S15		15	3330	1134	60		18	2000	92
MKWI50-48S24		24	2080	1143	50		30	750	91

Input Specifications

Parameter		Conditions / Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (100ms. max)		24V Input Models	-0.7	---	50	VDC
		48V Input Models	-0.7	---	100	
Start-Up Threshold Voltage		24V Input Models	---	---	9	
		48V Input Models	---	---	18	
Under Voltage Lockout		24V Input Models	---	7.5	---	
		48V Input Models	---	16	---	
Input Polarity Protection		None				
Start Up Time	Power Up	Nominal Vin and Constant Resistive Load	---	---	30	ms
	Remote On/Off		---	---	30	ms
Input Filter		All Models	Internal LC Type			

Remote On/Off Control

Parameter	Conditions	Min.	Typ.	Max.	Unit
Converter On	3.5V ~ 12V or Open Circuit				
Converter Off	0V ~ 1.2V or Short Circuit				
Control Input Current (on)	Vctrl = 5.0V	---	0.5	---	mA
Control Input Current (off)	Vctrl = 0V	---	-0.5	---	mA
Control Common	Referenced to Negative Input				
Standby Input Current	Nominal Vin	---	2.5	---	mA

Output Specifications

Parameter	Conditions / Model		Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy			---	---	±1.0	%Vnom.
Line Regulation	Vin=Min. to Max. @Full Load		---	---	±0.5	%
Load Regulation	Min. Load to Full Load		---	---	±0.5	%
Minimum Load	No minimum Load Requirement					
Ripple & Noise	0-20 MHz Bandwidth	3.3V & 5V Models(3)	---	---	100	mV P-P
		12V, 15V & 24V Models(3)	---	---	150	mV P-P
Transient Recovery Time	25% Load Step Change(2)		---	250	---	μsec
Transient Response Deviation			---	±3	±5	%
Temperature Coefficient			---	---	±0.02	%/°C
Trim Up / Down Range (See Page 8)	% of nominal output voltage (24Vo Models)		---	---	+20 / -10	%
	% of nominal output voltage (Other Models)		---	---	±10	%
Over Load Protection	Hiccup		---	150	---	%
Short Circuit Protection	Hiccup Mode 0.3 Hz typ., Automatic Recovery					

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	1500	---	---	VDC
	1 Seconds	1800	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100KHz, 1V	---	---	2200	pF
Switching Frequency		---	285	---	KHz
MTBF(calculated)	MIL-HDBK-217F@25°C, Ground Benign	230,900			Hours
Safety Approvals	UL/cUL 60950-1 recognition (CSA certificate), IEC/EN 60950-1 (CB-report)				

Environmental Specifications

Parameter	Conditions / Model	Min.	Max. without Heatsink	Max. with Heatsink	Unit
Operating Ambient Temperature Range Natural Convection (8) Nominal Vin, Load 100% Inom. (for Power Derating see relative Derating Curves)	MKWI50-24S033, MKWI50-48S033	-40	61	69	°C
	MKWI50-24S12, MKWI50-24S15		53	62	
	MKWI50-48S12, MKWI50-48S15				
	MKWI50-24S05, MKWI50-24S24		46	57	
	MKWI50-48S05, MKWI50-48S24				
Thermal Impedance	Natural Convection without Heatsink	12.1	---		°C/W
	Natural Convection with Heatsink	9.8	---		°C/W
	100LFM Convection without Heatsink	9.2	---		°C/W
	100LFM Convection with Heatsink	5.4	---		°C/W
	200LFM Convection without Heatsink	7.8	---		°C/W
	200LFM Convection with Heatsink	4.5	---		°C/W
	400LFM Convection without Heatsink	5.2	---		°C/W
	400LFM Convection with Heatsink	3.0	---		°C/W
Case Temperature		---	+105		°C
Thermal Protection	Shutdown Temperature	110°C typ.			
Storage Temperature Range		-50	+125		°C
Humidity (non condensing)		---	95		% rel. H
Cooling	Natural convection				
RFI	Six-Sided Shielded, Metal Case				
Lead Temperature (1.5mm from case for 10Sec.)		---	260		°C

EMC Specifications

Parameter	Standards & Level		Performance
EMI	Conduction	EN55022, FCC part 15	Class A
EMS	EN55024		
	ESD	EN61000-4-2 air ± 8kV , Contact ± 6kV	A
	Radiated immunity	EN61000-4-3 10V/m	A
	Fast transient (7)	EN61000-4-4 ±2kV	A
	Surge (7)	EN61000-4-5 ±1kV	A
	Conducted immunity	EN61000-4-6 10Vrms	A

External Filter meets Conducted EMI EN55022 class A; FCC part 15 level A

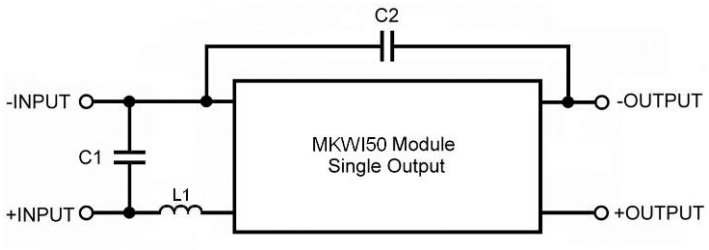

Model	C1	C2	L1
MKWI50-24SXX	10μF/50V 1210 X7S MLCC	1000pF/2KV 1206 MLCC	1.5μH
MKWI50-48SXX	3.3μF/100V 1210 X7S MLCC	1000pF/2KV 1206 MLCC	6.8μH

Power Derating Curve

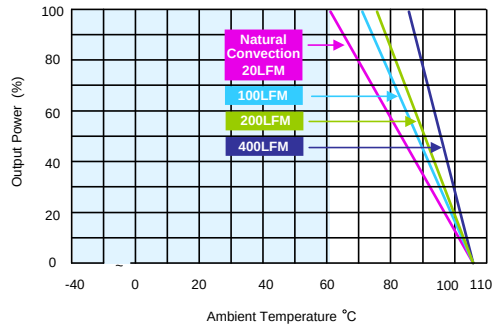

MKWI50-24S033,MKWI50-48S033 Derating Curve without Heatsink

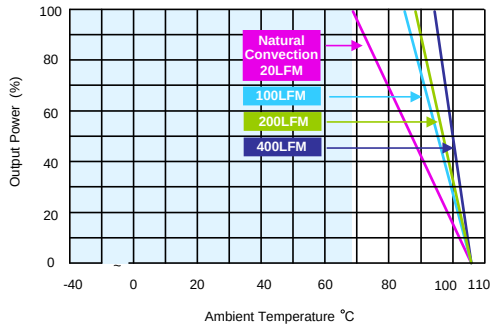

MKWI50-24S033,MKWI50-48S033 Derating Curve with Heatsink

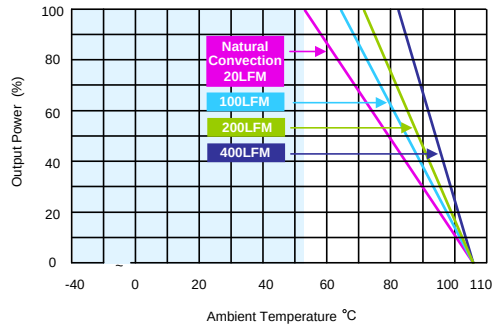

MKWI50-24S12,MKWI50-24S15, MKWI50-48S12, MKWI50-48S15
Derating Curve without Heatsink

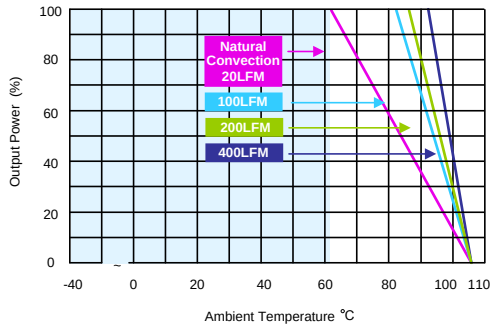

MKWI50-24S12,MKWI50-24S15, MKWI50-48S12, MKWI50-48S15
Derating Curve with Heatsink

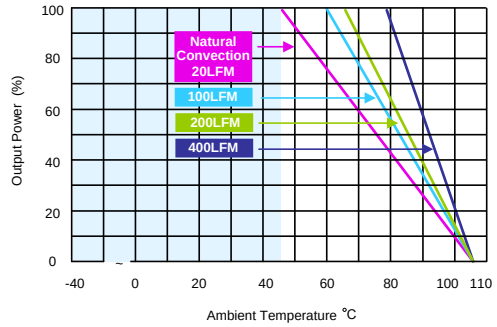

MKWI50-24S05, MKWI50-24S24, MKWI50-48S05, MKWI50-48S24
Derating Curve without Heatsink

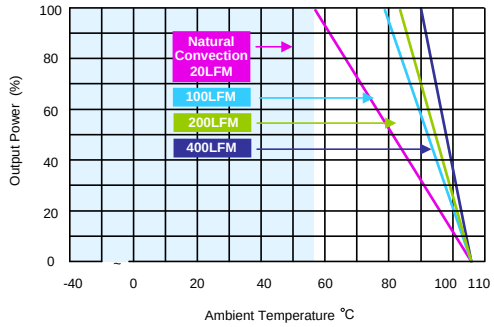

MKWI50-24S05, MKWI50-24S24, MKWI50-48S05, MKWI50-48S24
Derating Curve with Heatsink

Efficiency Curve @25℃

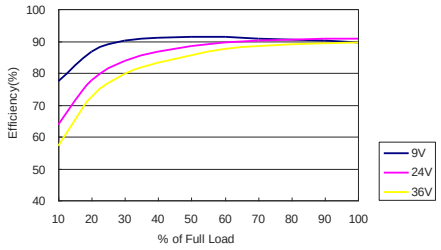

MKWI50-24S033 Efficiency vs Load Current

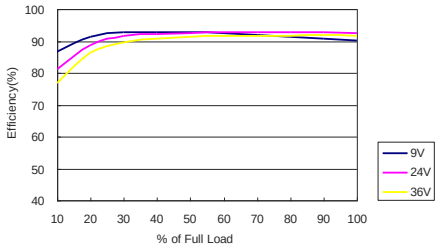

MKWI50-24S05 Efficiency vs Load Current

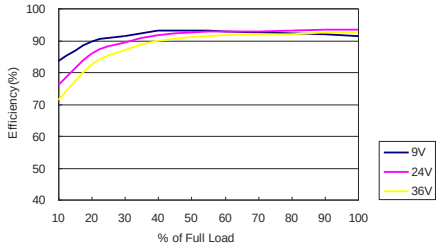

MKWI50-24S12 Efficiency vs Load Current

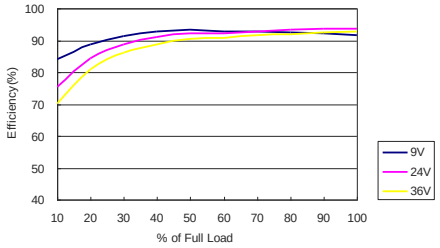

MKWI50-24S15 Efficiency vs Load Current

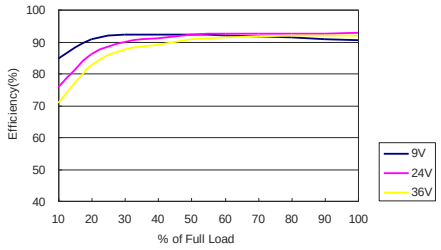

MKWI50-24S24 Efficiency vs Load Current

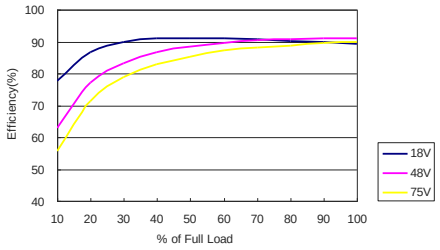

MKWI50-48S033 Efficiency vs Load Current

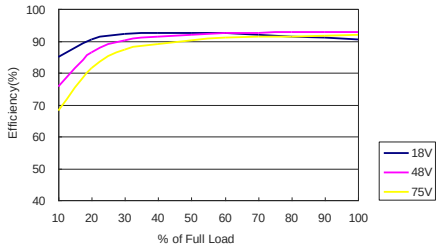

MKWI50-48S05 Efficiency vs Load Current

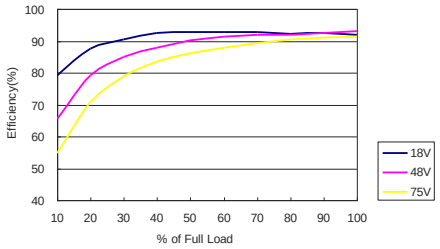

MKWI50-48S12 Efficiency vs Load Current

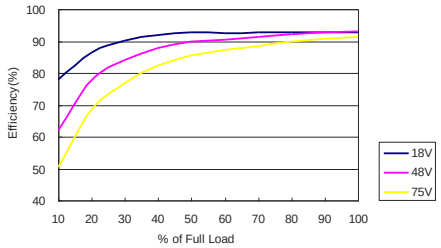

MKWI50-48S15 Efficiency vs Load Current

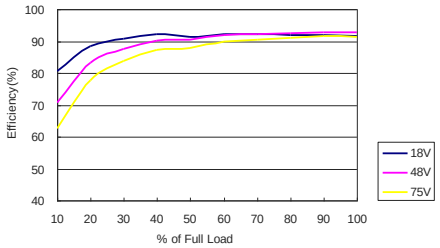

MKWI50-48S24 Efficiency vs Load Current

Notes

1. Specifications typical at Ta=+25℃, resistive load, nominal input voltage, rated output current unless otherwise noted.
2. Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
3. Ripple & Noise measurement with a 1μF MLCC and a 10μF Tantalum Capatitor.
4. We recommend to protect the converter by a slow blow fuse in the input supply line.
5. Other input and output voltage may be available, please contact factory.
6. To meet EN61000-4-4 & EN61000-4-5 an external capacitor across the input pins is required .Suggested capacitor : 220μF/100V.
7. Do not exceed maximum power specification when adjusting output voltage.
8. That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
9. Specifications are subject to change without notice.

Package Specifications

Mechanical Dimensions

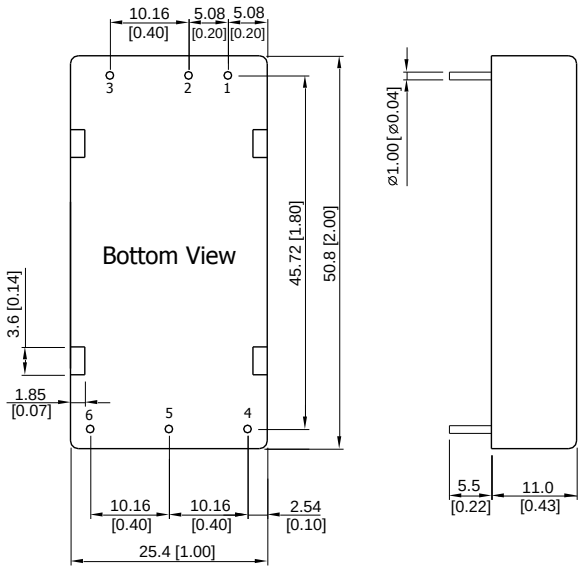

Pin Connections

Pin	Function
1	+Vin
2	-Vin
3	Remote On/Off
4	+Vout
5	-Vout
6	Trim

- All dimensions in mm (inches)
- Tolerance : X.X±0.25 (X.XX±0.01)
  X.XX±0.13 (X.XXX±0.005)
- Pin diameter ∅ 1.0 ±0.05 (0.04±0.002)

Physical Characteristics

Case Size	:	50.8x25.4x11.0mm (2.0x1.0x0.43 inches)
Case Material	:	Aluminium Alloy, Black Anodized Coating
Base Material	:	FR4 PCB (flammability to UL 94V-0 rated)
Pin Material	:	Copper Alloy with Gold Plate Over Nickel Subplate
Potting Material	:	Epoxy (UL94-V0)
Weight	:	34g

Heatsink (Option –HS)

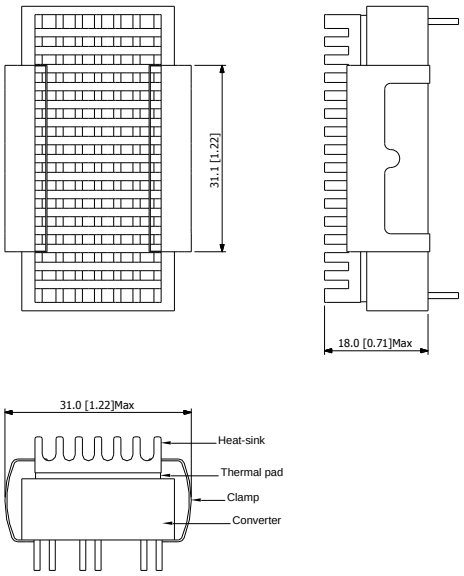

Physical Characteristics		
Heatsink Material	:	Aluminum
Finish	:	Black Anodized Coating
Weight	:	9g

▶ The advantages of adding a heatsink are:

1. To improve heat dissipation and increase the stability and reliability of the DC/DC converters at high operating temperatures.
2. To increase operating temperature of the DC/DC converter, please refer to Derating Curve.

External Output Trimming

Output can be externally trimmed by using the method shown below

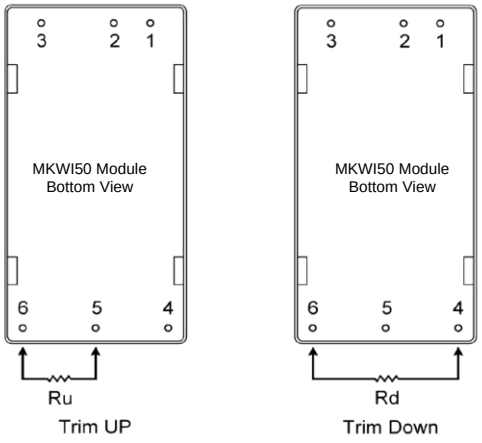

MKWI50-XXS033 Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	72.61	32.55	19.20	12.52	8.51	5.84	3.94	2.51	1.39	0.50	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	60.84	27.40	16.25	10.68	7.34	5.11	3.51	2.32	1.39	0.65	KOhms

MKWI50-XXS05 Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	138.88	62.41	36.92	24.18	16.53	11.44	7.79	5.06	2.94	1.24	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	106.87	47.76	28.06	18.21	12.30	8.36	5.55	3.44	1.79	0.48	KOhms

MKWI50-XXS12 Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	413.55	184.55	108.22	70.05	47.15	31.88	20.98	12.80	6.44	1.35	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	351.00	157.50	93.00	60.75	41.40	28.50	19.29	12.37	7.00	2.70	KOhms

MKWI50-XXS15 Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	530.73	238.61	141.24	92.56	63.35	43.87	29.96	19.53	11.41	4.92	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	422.77	189.89	112.26	73.44	50.15	34.63	23.54	15.22	8.75	3.58	KOhms

MKWI50-XXS24 Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	333.39	148.80	87.26	56.50	38.04	25.73	16.94	10.35	5.22	1.12	KOhms
Trim up	2	4	6	8	10	12	14	16	18	20	%
Vout=	Vox1.02	Vox1.04	Vox1.06	Vox1.08	Vox1.1	Vox1.12	Vox1.14	Vox1.16	Vox1.18	Vox1.2	Volts
Ru=	243.70	108.50	63.43	40.90	27.38	18.37	11.93	7.10	3.34	0.34	KOhms

Order Code Table

Standard	With heatsink
MKWI50-24S033	MKWI50-24S033-HS
MKWI50-24S05	MKWI50-24S05-HS
MKWI50-24S12	MKWI50-24S12-HS
MKWI50-24S15	MKWI50-24S15-HS
MKWI50-24S24	MKWI50-24S24-HS
MKWI50-48S033	MKWI50-48S033-HS
MKWI50-48S05	MKWI50-48S05-HS
MKWI50-48S12	MKWI50-48S12-HS
MKWI50-48S15	MKWI50-48S15-HS
MKWI50-48S24	MKWI50-48S24-HS

Test Setup

Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with a inductor Lin (4.7μH) and Cin (220μF, ESR < 1.0Ω at 100 KHz) to simulate source impedance. Capacitor Cin, offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 KHz.

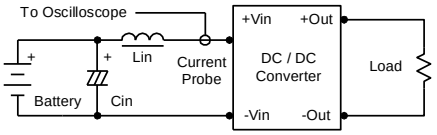

Peak-to-Peak Output Noise Measurement Test

Use a 1μF ceramic capacitor and a 10μF tantalum capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

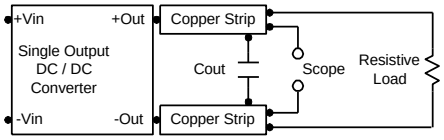

Technical Notes

Remote On/Off

Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is 0V to 1.2V. A logic high is 3.5V to 12V. The maximum sink current at the on/off terminal (Pin 3) during a logic low is -100μA.

Overload Protection

To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.

Overvoltage Protection

The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overvoltage. The OVP level can be found in the output data.

Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 Ω at 100 KHz) capacitor of a 10μF for the 24V and 48V devices.

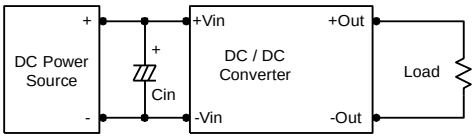

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7μF capacitors at the output.

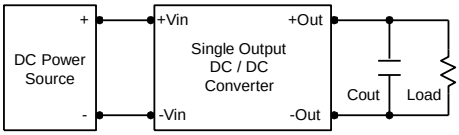

Maximum Capacitive Load

The MKWI50 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105°C. The derating curves are determined from measurements obtained in a test setup.