

FEATURES

- ▶ Smallest Encapsulated 8W Converter
- ▶ Industrial Standard DIP-16 Package
- ▶ Wide 2:1 Input Voltage Range
- ▶ Fully Regulated Output Voltage
- ▶ I/O Isolation 1500 VDC
- ▶ Operating Ambient Temp. Range -40°C to +80°C
- ▶ Low No Load Power Consumption
- ▶ No Min. Load Requirement
- ▶ Under-voltage, Overload and Short Circuit Protection
- ▶ Shielded Metal Case with Insulated Baseplate
- ▶ Conducted EMI EN 55032 Class A Approved
- ▶ UL/cUL/IEC/EN 62368-1(60950-1) Safety Approval & CE Marking


PRODUCT OVERVIEW

The MINMAX MDW08 series is a generation of high power density in DC-DC converter modules. The product offers a full 8W isolated DC-DC converter within an encapsulated DIP-16 package which occupies only 0.5 in² of PCB space. There are 21 models available for 12, 24, 48VDC with wide 2:1 input voltage range. Further features include under-voltage protection, overload protection, short circuit protection and no min. load requirement as well. An high efficiency allows operating temperatures range of -40°C to +80°C. These DC-DC converters offer a better solution for critical space applications like battery-powered equipment, instrumentation, distributed power architectures in communication, industrial electronics, energy facilities and others.

Model Selection Guide

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current Max. mA	Input Current		Max. capacitive Load μF	Efficiency (typ.) @Max. Load %
				@Max. Load	@No Load		
				mA(typ.)	mA(typ.)		
MDW08-12S033	12 (9 ~ 18)	3.3	1600	564	10	680	78
MDW08-12S05		5	1600	823		680	81
MDW08-12S12		12	665	792		330	84
MDW08-12S15		15	535	796		330	84
MDW08-12S24		24	335	788		150	85
MDW08-12D12		±12	±335	788		150#	85
MDW08-12D15		±15	±265	789		150#	84
MDW08-24S033	24 (18 ~ 36)	3.3	1600	282	10	680	78
MDW08-24S05		5	1600	407		680	82
MDW08-24S12		12	665	391		330	85
MDW08-24S15		15	535	393		330	85
MDW08-24S24		24	335	390		150	86
MDW08-24D12		±12	±335	394		150#	85
MDW08-24D15		±15	±265	385		150#	86
MDW08-48S033	48 (36 ~ 75)	3.3	1600	141	8	680	78
MDW08-48S05		5	1600	206		680	81
MDW08-48S12		12	665	196		330	85
MDW08-48S15		15	535	197		330	85
MDW08-48S24		24	335	195		150	86
MDW08-48D12		±12	±335	195		150#	86
MDW08-48D15		±15	±265	193		150#	86

For each output

Input Specifications						
Parameter	Model	Min.	Typ.	Max.	Unit	
Input Surge Voltage (1 sec. max.)	12V Input Models	-0.7	---	25	VDC	
	24V Input Models	-0.7	---	50		
	48V Input Models	-0.7	---	100		
Start-Up Threshold Voltage	12V Input Models	---	---	9		
	24V Input Models	---	---	18		
	48V Input Models	---	---	36		
Under Voltage Shutdown	12V Input Models	---	8	---		
	24V Input Models	---	16	---		
	48V Input Models	---	34	---		
Input Filter	All Models	Internal Pi Type				


Output Specifications						
Parameter	Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Setting Accuracy		---	---	±2.0	%Vom.	
Output Voltage Balance	Dual Output, Balanced Loads	---	±1.0	±2.0	%	
Line Regulation	Vin=Min. to Max. @Full Load	---	±0.2	±0.8	%	
Load Regulation	Io=0% to 100%	---	±0.5	±1.0	%	
Minimum Load	No minimum Load Requirement					
Ripple & Noise	0-20 MHz Bandwidth	---	---	55	mV _{P-P}	
Transient Recovery Time	25% Load Step Change	---	---	500	µsec	
Transient Response Deviation		---	±3	±5	%	
Temperature Coefficient		---	±0.01	±0.02	%/°C	
Over Load Protection	Hiccup	---	150	---	%	
Short Circuit Protection	Continuous, Automatic Recovery (Hiccup Mode 0.3Hz typ.)					

General Specifications						
Parameter	Conditions	Min.	Typ.	Max.	Unit	
I/O Isolation Voltage	60 Seconds	1500	---	---	VDC	
	1 Second	1800	---	---	VDC	
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ	
I/O Isolation Capacitance	100kHz, 1V	---	500	---	pF	
Switching Frequency		---	370	---	kHz	
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	1,062,864	---	---	Hours	
Safety Approvals	UL/cUL 60950-1 recognition (UL certificate), IEC/EN 60950-1 (CB-report)					
	UL/cUL 62368-1 recognition (UL certificate), IEC/EN 62368-1 (CB-report)					


EMC Specifications					
Parameter		Standards & Level		Performance	
		EMI	Conduction	EN 55032	Without external components
	Radiation	With external components			
EMS	EN 55024				
	ESD		EN 61000-4-2 Air ± 8kV , Contact ± 6kV		A
	Radiated immunity		EN 61000-4-3 10V/m		A
	Fast transient ⁽⁵⁾		EN 61000-4-4 ±2kV		A
	Surge ⁽⁵⁾		EN 61000-4-5 ±1kV		A
	Conducted immunity		EN 61000-4-6 10Vrms		A
	PFMF		EN 61000-4-8 100A/m		A

Environmental Specifications

Parameter	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	-40	+80	°C
Case Temperature	---	+105	°C
Storage Temperature Range	-50	+125	°C
Humidity (non condensing)	---	95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)	---	260	°C

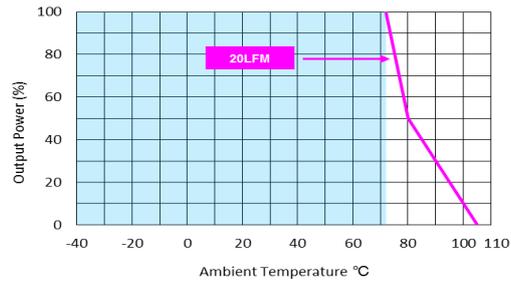Power Derating Curve

Notes

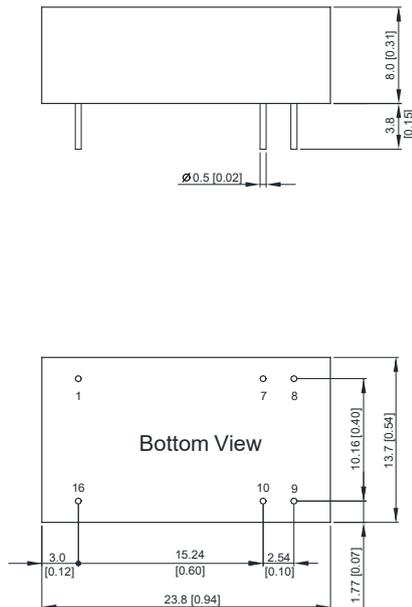- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact MINMAX.
- 5 To meet EN 61000-4-4 & EN 61000-4-5 an external capacitor across the input pins is required, please contact MINMAX.
- 6 Specifications are subject to change without notice.

Package Specifications
Mechanical Dimensions

Pin Connections

Pin	Single Output	Dual Output
1	-Vin	-Vin
7	NC	NC
8	NC	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin

NC: No Connection

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- ▶ Pin diameter $\varnothing 0.5 \pm 0.05$ (0.02±0.002)


Physical Characteristics

Case Size	: 23.8x13.7x8.0 mm (0.94x0.54x0.31 inches)
Case Material	: Aluminium Alloy, Black Anodized Coating
Pin Material	: Copper Alloy with Tin Plate Over Nickel Subplate
Weight	: 6.1g

Test Setup

Peak-to-Peak Output Noise Measurement Test

Use a C_{out} 0.47 μ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

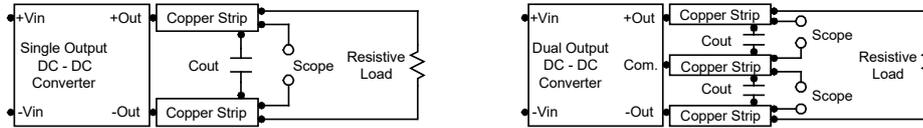


Technical Notes

Overload Protection

To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.


Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 Ω at 100 kHz) capacitor of a 3.3 μ F for the 12V input devices and a 2.2 μ F for the 24V and 48V devices.

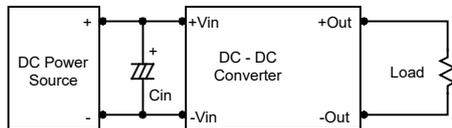

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 μ F capacitors at the output.

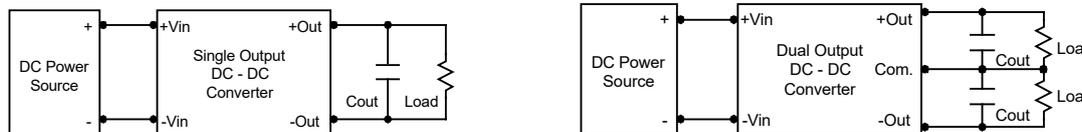

Maximum Capacitive Load

The MDW08 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105 $^{\circ}$ C. The derating curves are determined from measurements obtained in a test setup.

