

FEATURES

- ► Industrial Standard SIP-7 Package
- Unregulated Output Voltage
- ► I/O Isolation 3000VAC with Reinforced Insulation, rated for 300Vrms Working Voltage
- ▶ Operating Ambient Temp. Range -25°C to +85°C
- ► Medical EMC Standard with 4th Edition of EMI EN 55011 and EMS EN 60601-1-2 Approved
- ► Medical Safety with 1xMOPP & 2xMOOP per 3rd Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1 Approved
- ► UL/cUL/IEC/EN 62368-1(60950-1) Safety Approval & CE Marking



















PRODUCT OVERVIEW

The MINMAX MAU400 series is a range of 1W DC-DC converter modules providing a high I/O isolation voltage of 3000VAC with reinforced insulation, which rated for 300Vrms working voltage in a small SIP-package. There are 12 models available for 5VDC or 12VDC input voltage and single or dual output voltage. This product offers the best solution for many applications in industrial controls and Instrumentation, consumer electronics and everywhere where a certified supplementary or reinforced insulation system is required to comply with relative safety standards.

Model Selec	ction Guide								
Model Number	Input Voltage			Load Regulation	Max. capacitive Load	Efficiency (typ.)			
	(Range)		Max.	Min.	@Max. Load	@No Load			@Max. Load
	VDC	VDC	mA	mA	mA(typ.)	mA(typ.)	% (max.)	μF	%
MAU401		5	200	4	303		10		66
MAU402		12	80	2	291		8	680	66
MAU403	5	15	65	1	295		8		66
MAU404	(4.5 ~ 5.5)	±5	±100	±2	303	55	10	220#	66
MAU405		±12	±40	±1	267		8		72
MAU406		±15	±35	±1	287		8		73
MAU411		5	200	4	126		10		66
MAU412		12	80	2	121		8	680	66
MAU413	12	15	65	1	123	20	8	66	
MAU414	(10.8 ~ 13.2)	±5	±100	±2	126	30	10	220#	66
MAU415		±12	±40	±1	108		8		74
MAU416		±15	±35	±1	117		8		75

^{*} Min. Output Current for Lower Load Regulation

For each output

Input Specifications							
Parameter	Model	Min.	Тур.	Max.	Unit		
Innut Veltage Dange	5V Input Models	4.5	5	5.5			
Input Voltage Range	12V Input Models	10.8	12	13.2	\/DC		
Innuit Curre Valtere (4 and man)	5V Input Models	-0.7		9	VDC		
Input Surge Voltage (1 sec. max.)	12V Input Models	-0.7		29			
Input Filter	All Models		Internal	LC Type			




Output Specifications						
Parameter	Conditions	Min.	Тур.	Max.	Unit	
Output Voltage Setting Accuracy			±1.0	±3.0	%Vnom.	
Output Voltage Balance	Dual Output, Balanced Loads		±0.1	±1.0	%	
Line Regulation	For Vin Change of 1%		±1.2	±1.5	%	
Load Regulation	lo=20% to 100%		See Model Selection Guide			
Ripple & Noise	0-20MHz Bandwith			150	mV _{P-P}	
Temperature Coefficient			±0.01	±0.02	%/°C	
Short Circuit Protection 0.5 Second Max., Automatic Recovery						

Isolation, Safety Standards							
Parameter	Conditions	Min.	Тур.	Max.	Unit		
I/O Isolation Voltage	60 Seconds Reinforced insulation, rated for 300Vrms working voltage	3000			VAC		
I/O Isolation Resistance	500 VDC	10			GΩ		
I/O Isolation Capacitance	100kHz, 1V		15	20	pF		
	UL/cUL 60950-1, CSA C22.2 No. 60950-1						
Safety Standards	ANSI/AAMI ES 60601-1, CAN/CSA-C22.2 No. 60601-1						
	IEC/EN 60950-1, IEC/EN 60601-1 3 rd Edition 1xMOPP & 2xMOOP						
	UL/cUL 60950-1 recognition (UL certificate), IEC/EN 60950-1 (CB-report)						
Safety Approvals	UL/cUL 62368-1 recognition (UL certificate), IEC/EN 62368-1 (CB-report)						
	ANSI/AAMI ES 60601-1 1xMOPP & 2xMOOP recognition (UL certificate), IEC/EN 60601-1 3rd Edition (CB-report)						

General Specifications							
Parameter	Conditions	Min.	Тур.	Max.	Unit		
Switching Frequency		50	80	100	kHz		
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	2,000,000			Hours		


Environmental Specifications					
Parameter	Min.	Max.	Unit		
Operating Ambient Temperature Range (See Power Derating Curve)	-25	+85	℃		
Case Temperature		+105	℃		
Storage Temperature Range	-50	+125	℃		
Humidity (non condensing)		95	% rel. H		
Lead Temperature (1.5mm from case for 10Sec.)		260	°C		

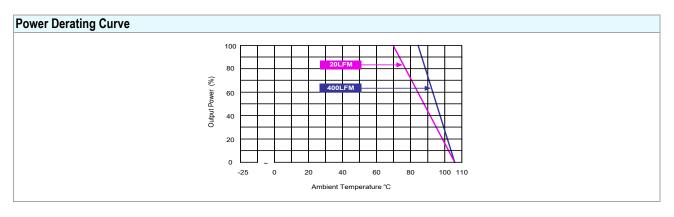



Notes

- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact MINMAX.
- 5 Specifications are subject to change without notice.
- The repeated high voltage isolation testing of the converter can degrade isolation capability, to a lesser or greater degree depending on materials, construction, environment and and reflow solder process. Any material is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage. Furthermore, the high voltage isolation capability after reflow solder process should be evaluated as it is applied on system.

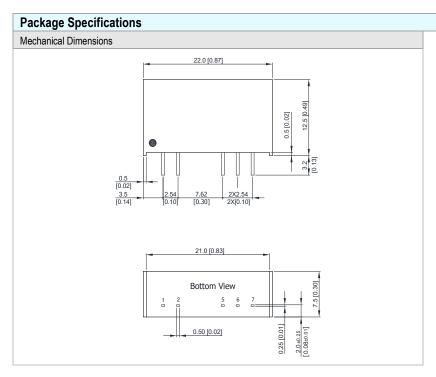

Pin Connections						
Pin	Single Output	Dual Output				
1	+Vin	+Vin				
2	-Vin	-Vin				
5	-Vout	-Vout				
6	No Pin	Common				
7	+Vout	+Vout				

- ► All dimensions in mm (inches)
- ➤ Tolerance: X.X±0.5 (X.XX±0.02) X.XX±0.13 (X.XXX±0.005)
- ► Pins ±0.05 (±0.002)

Physical Characteristics

Case Size : 22.0x7.5x12.5mm (0.87x0.30x0.49 inches)

Case Material : Non-Conductive Black Plastic (flammability to UL 94V-0 rated)


Pin Material : Alloy 42
Weight : 3.9g




Test Setup

Peak-to-Peak Output Noise Measurement Test

Use a Cout 0.33µF ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.






Technical Notes

Maximum Capacitive Load

The MAU400 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. For optimum performance we recommend 220µF maximum capacitive load for dual outputs and 680µF capacitive load for single outputs. The maximum capacitance can be found in the data sheet.


Input Source Impedance


The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0Ω at 100 kHz) capacitor of a $2.2\mu\text{F}$ for the 5V input devices, a $1.0\mu\text{F}$ for the 12V input devices.



Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 1.5µF capacitors at the output.





Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105°C. The derating curves are determined from measurements obtained in a test setup.

